

LiFePO4 25.6V - 150AH Battery

ELECTRICAL PERFORMANCE

Nominal Voltage	25.6 V
Nominal Capacity	150 Ah
Capacity @ 40A	300 min
Energy	3840 Wh
Resistance	≤30 mΩ @ 50% SOC
Self Discharge	<3% / Month
Cells	LFP Cell 3.2V

CHARGE PERFORMANCE

Recommended Charge Current	30A
Max Charge Current	75 A
Recom. Charge Voltage	<29.2 V
BMS Charge Cut-Off Voltage	<30.4 V (0.5-1.5 s)
BMS Reconnect Voltage	>28.0 V
Balancing Voltage	27.2 V
Bluetooth Test Window & LED display	Standard accessories
Maximum Batteries in Series	2

DISCHARGE PERFORMANCE

Continuous Discharge Current	50A
Maximum continuous Discharge Current	100 A
BMS Peak Discharge Cut-Off Current	300 A (5 ~15 ms)
Recommended Low Voltage Disconnect	20.0 V
BMS Cut off / Reconnect Voltage	19.6V (50-150 ms) / >22.4 V
Short Circuit Protection	200 ~ 600 μs



MECHANICAL PERFORMANCE

Dimension (L x W x H)	522 x 240 x 218 mm
Approx. Weight	28.0 kg
Terminal Type	M8
Terminal Torque	9 ~ 11 N-m
Case Material	ABS
Enclosure Protection	IP65


TEMPERATURE PERFORMANCE

Discharge Temperature	-20 ~ 60 °C
Charge Temperature	0 ~ 45 °C
Storage Temperature	-5 ~ 35 °C
High Temperature Cut-Off	65 °C
Reconnect Temperature	48 °C

COMPLIANCE

Certifications	CE, UN38.3, UL1973 & IEC62619
Shipping Classification	UN 3480, CLASS 9

DIMENSIONS

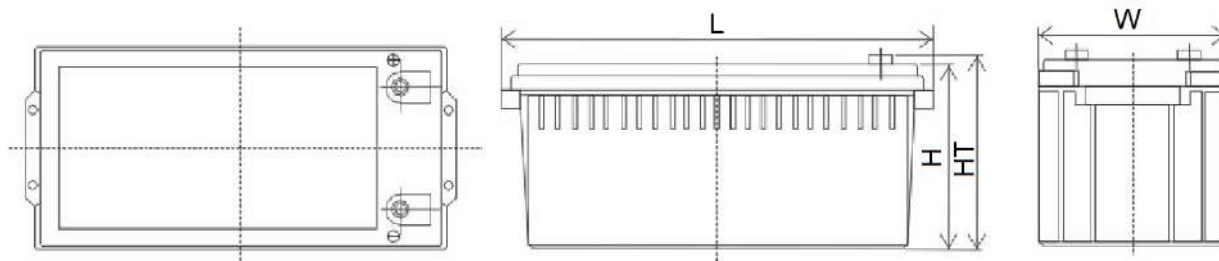


L mm	W mm	H mm	HT mm
522	240	218	222


LiFePO4 25.6V - 150AH Battery

PERFORMANCE CHARACTERISTICS


12.8V Discharge Performance at 25 °C

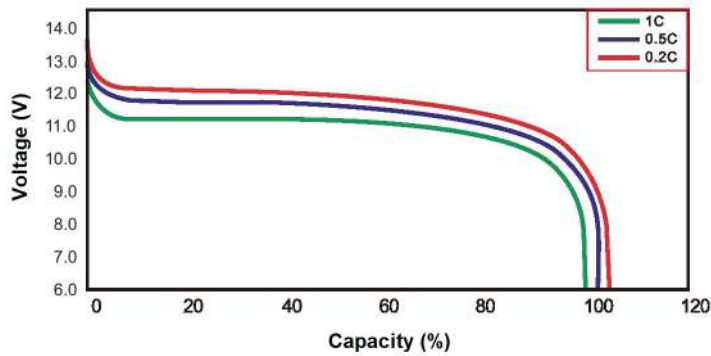


Temperature vs Capacity at 0.2C

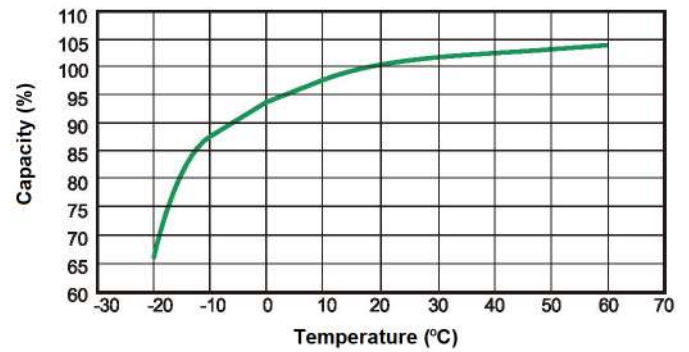

12.8V State Of Charge vs Open Circuit Voltage

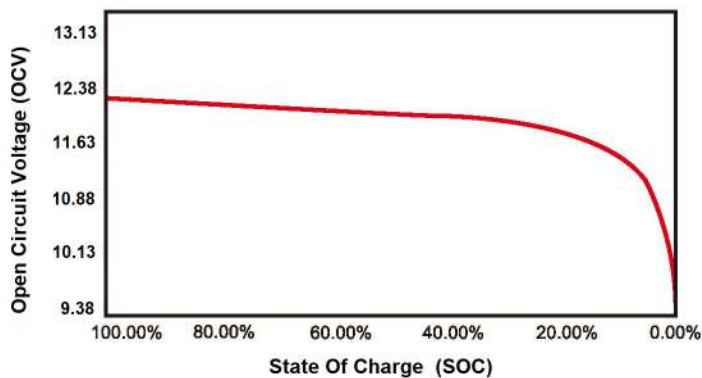

Cycle Life vs D.o.D. at 25 °C, 0.2C

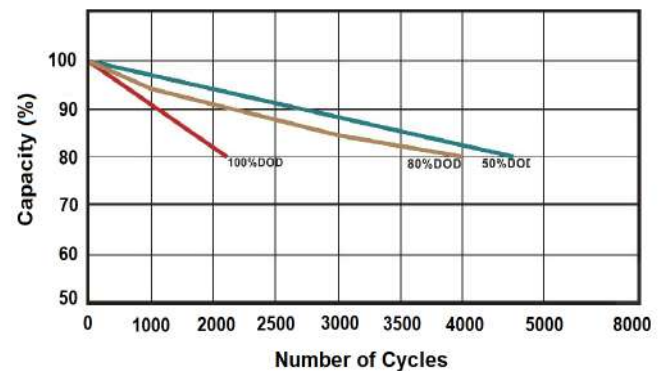

FEATURES & BENEFITS



High cycle life

>4600 cycles @ 50% DoD for effectively lower total cost of ownership.



Longer service life

Low maintenance batteries with stable chemistry. Easily monitor state of charge (SoC) of smart models.



Built in circuit protection

Battery Management Systems (BMS) are incorporated against abuse.



Better storage

Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



Quickly recharge

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



Extreme heat tolerance

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



Lightweight

Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

APPLICATIONS

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries. Suitable applications include:

- Solar Storage
- Marine
- Electric tools
- Buggies
- Caravan
- Remote Monitoring
- Switching applications and more

CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.