




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


APOLLO 12V-2.3AH

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 2.0 Ah	20 hr @ 0.10 A : 2.0 Ah
● DIMENSIONS	10 hr @ 0.18 A : 1.8 Ah
TOTAL HEIGHT : 67 mm (2.64 inches)	5 hr @ 0.32 A : 1.6 Ah
CONTAINER HEIGHT : 60 mm (2.36 inches)	1 hr @ 1.2 A : 1.2 Ah
LENGTH : 178 mm (7.01 inches)	1 C @ 2.0 A : 1.0 Ah
WIDTH : 35 mm (1.38 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 60 mΩ
WEIGHT : APPROX 0.96 kg (2.12 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 20 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 60 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-01	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 0.60 A

Discharge Characteristics 25 °C (77 °F)

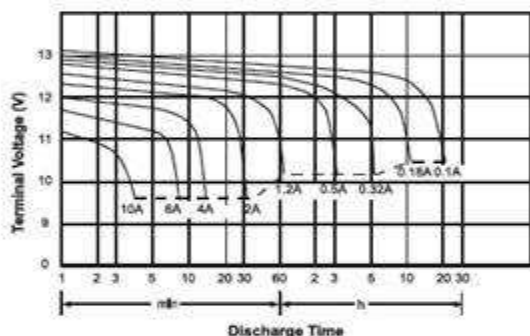


OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

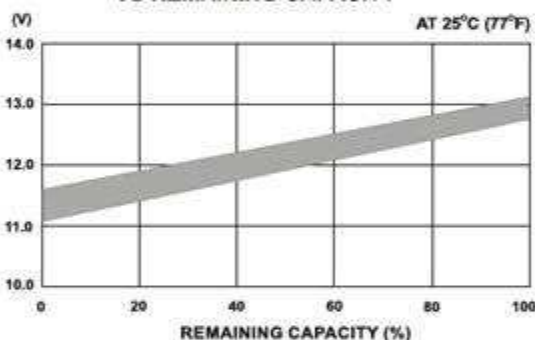

☆ Dimensions

mm(inch)

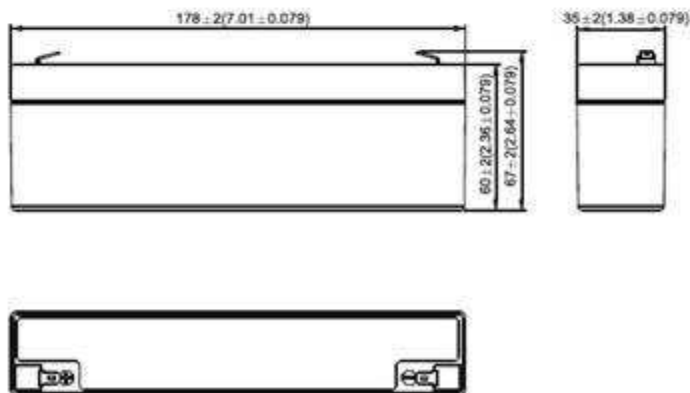

☆ Terminal

Type: FO-01

mm(inch)

