

MERCURY 180-6 (6V180Ah)



MERCURY 180-6 is GEL Deep cycle battery superiorly designed for frequent cyclic discharge applications under extreme temperature. By using strong grid to insure reliable performance under frequent cyclic discharge use, 400 cycles could be available at 100% DOD. Offering extra-durable cyclic performance, high efficiency of recovery, that is more suitable for solar, mobility, E-toll, marine, deep discharge UPS etc..

Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	180Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 26.5 Kg
Max. Discharge Current	1800 A (5 sec)
Internal Resistance	Approx. 5 mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	6.8 to 6.9 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	36 A
Equalization and Cycle Service	7.1 to 7.2 VDC/unit Average at 25°C
Self Discharge	Mercury Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F12
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539





GB21296-99B-E-16




ISO9001:2000 Certificate

Dimensions

Unit: mm Dimension: 306(L)×168(W)×222(H)

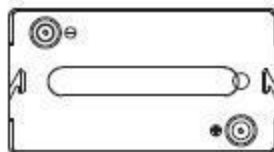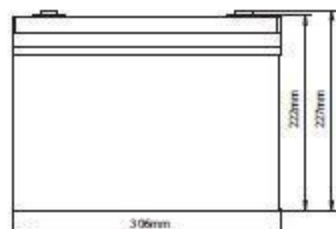

Terminal F12



Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	451.3	322.9	259.2	173.7	105.9	63.38	43.80	35.90	29.39	20.24	17.11	9.413
5.00V	438.2	307.3	253.9	171.0	105.4	62.90	43.64	35.73	29.21	20.08	16.95	9.242
5.10V	425.2	296.4	249.9	171.1	104.4	62.42	43.30	35.57	29.04	19.91	16.79	9.071
5.25V	386.3	276.8	240.8	168.5	103.5	61.95	43.13	35.24	28.69	19.75	16.62	8.900
5.40V	352.8	255.4	224.5	162.7	101.0	60.83	41.96	34.40	28.18	19.42	16.46	8.729
5.55V	304.7	230.9	203.7	153.8	95.97	58.13	40.11	32.74	26.97	18.60	15.96	8.215

Constant Power Discharge Characteristics: W (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	2334	1720	1426	990.3	611.9	373.5	260.6	214.0	175.3	120.8	102.3	56.43
5.00V	2288	1667	1403	978.9	610.5	371.5	260.7	213.7	174.8	120.3	101.6	55.45
5.10V	2262	1623	1387	981.5	605.8	369.3	259.6	213.2	174.2	119.5	100.7	54.43
5.25V	2083	1529	1339	968.0	600.3	366.6	258.6	211.2	172.2	118.5	99.73	53.40
5.40V	1919	1426	1252	936.9	589.2	361.9	251.5	206.4	169.1	116.5	98.74	52.37
5.55V	1705	1304	1140	888.4	564.0	348.5	240.7	196.5	161.8	111.6	95.78	49.29


All mentioned values are average values.

MERCURY 180-6


6V180Ah




Life characteristics of cyclic use

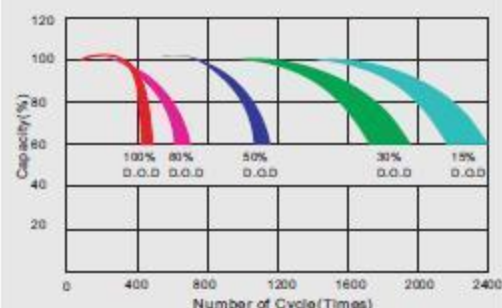


Storage characteristic

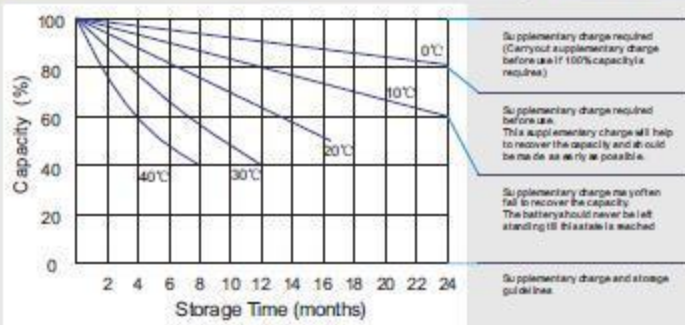

Charge characteristic curve for cyclic use

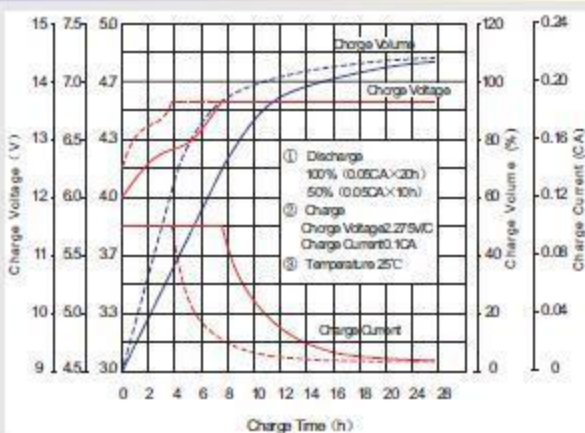

Discharge characteristic curve

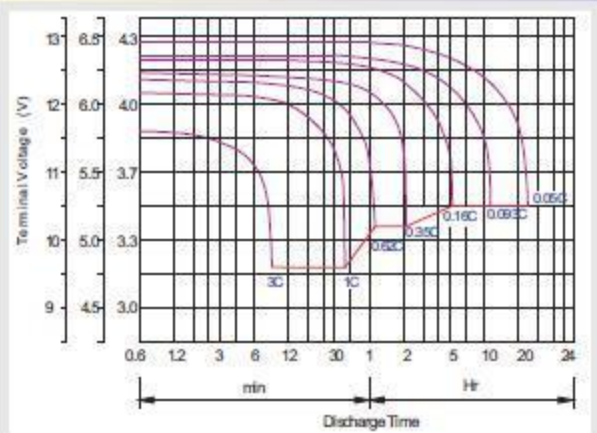

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h

Cycle service

- ※ Avoid battery over discharge, especially battery series connection use.
- ※ Charged with recommend voltage, ensure battery can be full recharged.
- In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
- ※ There are a number of factors that will affect the length of cyclic service.
- The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
- Generally speaking, the most important factors is depth of discharge.