



Battery Type	Nominal Voltage (V)	Nominal Capacity (Ah) at 1.75 Vpc (25°C)		Length (mm)	Width (mm)	Height (h) (mm)	Total Height (H) (mm)	Typical Weight (kg)	Terminal Position	Terminal Type	Maximum Current (25°C)		Internal Resistance (mOhm)	Short Circuit Current (A)
		20 h	10 h								Charging (A)	Discharging (A)		
SPA 4 - 9.5	4	9.6	8.8	102	44	95	101	1.05	A	F1	3.00	150.0	8	400
SPA 6 - 1.3	6	1.3	1.2	97	24	52	58	0.28	A	F1	0.39	19.5	52	120
SPA 6 - 2.8	6	2.8	2.6	66	33	97	104	0.49	C	F1	0.84	42.0	32	190
SPA 6 - 3.2	6	3.2	3.0	134	35	61	67	0.62	A	F1	0.96	48.0	28	200
SPA 6 - 4.5	6	4.0	3.6	70	47	101	107	0.65	C	F1	1.20	60.0	30	210
SPA 6 - 7	6	7.0	6.4	151	34	94	100	0.98	A	F1	2.10	105.0	16	380
SPA 6 - 8	6	8.0	7.4	98	56	117	119	1.20	E	F1	2.40	120.0	10	450
SPA 6 - 10	6	10.0	9.3	151	50	94	100	1.60	A	F1	3.00	150.0	14	460
SPA 6 - 12	6	12.0	11.2	151	50	94	100	1.70	A	F1	3.60	180.0	10	500
SPA 8 - 3.2	8	3.2	3.0	134	36	63	69	0.85	D	F1	0.96	48.0	28	270
SPA 12 - 0.7	12	0.8	0.7	96	25	62	62	0.33	-	F6	0.24	5.0	200	60
SPA 12 - 1.3	12	1.2	1.1	97	43	52	58	0.52	D	F1	0.36	18.0	90	130
SPA 12 - 1.9	12	2.0	1.9	178	35	61	67	0.65	A	F1	0.60	30.0	65	180
SPA 12 - 2C	12	2.0	1.9	144	24	65	65	0.65	G	F5	0.60	10.0	70	80
SPA 12 - 2.3	12	2.3	2.1	178	35	61	67	0.80	A	F1	0.69	34.5	60	200
SPA 12 - 3.3	12	3.3	3.0	134	67	61	67	1.22	D	F1	0.96	48.0	52	240
SPA 12 - 5	12	5.0	4.7	90	70	101	107	1.45	A	F1	1.58	75.0	26	450
SPA 12 - 6	12	6.0	5.5	151	52	94	99	1.83	F	F1	1.80	97.5	26	500
SPA 12 - 7	12	7.0	6.2	151	65	94	100	1.95	F	F1	2.10	105.0	26	400
SPA 12 - 7.2	12	7.2	6.7	151	65	94	100	2.20	F	F1	2.16	106.0	26	430
SPA 12 - 9	12	9.0	8.4	151	65	94	100	2.35	F	F1	2.70	135.0	19	640
SPA 12 - 10	12	10.0	9.3	151	98	95	101	3.00	F	F1	3.00	150.0	32	380
SPA 12 - 12	12	12.0	11.3	151	98	95	101	3.40	F	F1	3.60	180.0	19	640
SPA 12 - 18	12	18.0	15.8	181	77	167	167	5.00	B	F3	5.40	270.0	15	750
SPA 12 - 26	12	26.0	24.4	165	176	127	127	7.60	B	F3	7.80	390.0	12	1020
SPA 12 - 28	12	28.0	26.0	165	125	175	182	8.60	B	F4	8.40	420.0	11	1200

All dimensions and weights shown are subject to manufacturing tolerances


Temperature Effects on Float Life

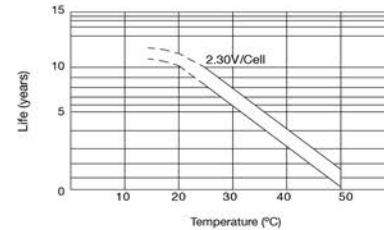


Self Discharge Characteristics

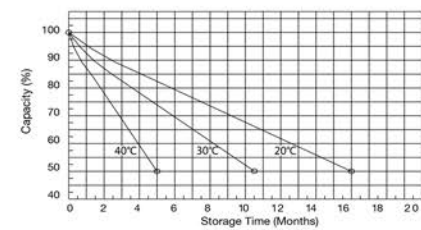

Discharge Characteristics (25°C)

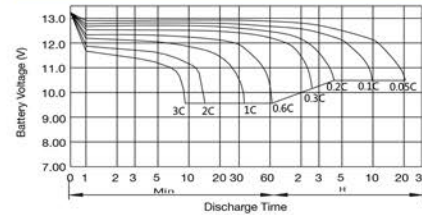


Charging Characteristics (25°C)

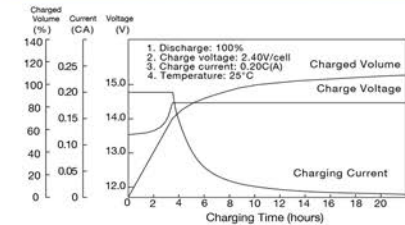

Drawings


Case Dimensions




Terminal Positions



Terminals



Relationship Between Charging Voltage and Temperature

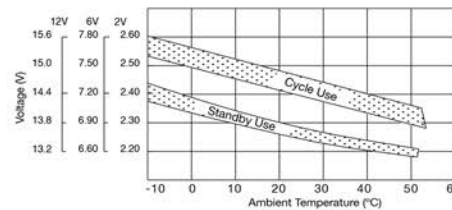

Temperature Effects on Capacity

