

SPA 12 - 1.3 | VRLA Battery



Specifications

Nominal Voltage	12 V		
Number of cells	6		
Design Life	10 years		
Dimensions	Length	97 mm	
	Width	43 mm	
	Height	52 mm	
	Total Height	58 mm	
Approx. Weight	0.52 kg		
Nominal Capacity (25°C)	20 hours rate (0.060 A, 10.5 V)	1.200 Ah	
	10 hours rate (0.106 A, 10.5 V)	1.060 Ah	
	5 hours rate (0.192 A, 10.5 V)	0.960 Ah	
	1 hour rate (0.736 A, 9.6 V)	0.736 Ah	
Max. Discharge Current (25°C)	18 A (5s)		
Max. Charging Current (25°C)	0.36 A		
Internal Resistance	90 mOhms		
Fully Charged battery (25°C)			
Self-Discharge (25°C)	3% of capacity declined per month (average)		
	Discharge	:-15~50°C	
	Charge	:-10~50°C	
Operating Temperature Range	Storage : -20~50°C		
Short Circuit Current	130 A		
Charging Characteristics (25°C)	Boost charging voltage	2.40-2.45 Vpc	
	Temperature compensation	-30 mV/°C	
	Float charging voltage	2.25-2.30 Vpc	
	Temperature compensation	-18 mV/°C	


Applications

- Uninterruptible Power Supplies (UPS)
- Electric Power Systems (EPS)
- Emergency backup power supplies
- Electronic apparatus and equipment
- Communication power supplies
- DC power supplies
- Auto control system

Battery Construction

Component	Positive Plate	Negative Plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

Dimensions

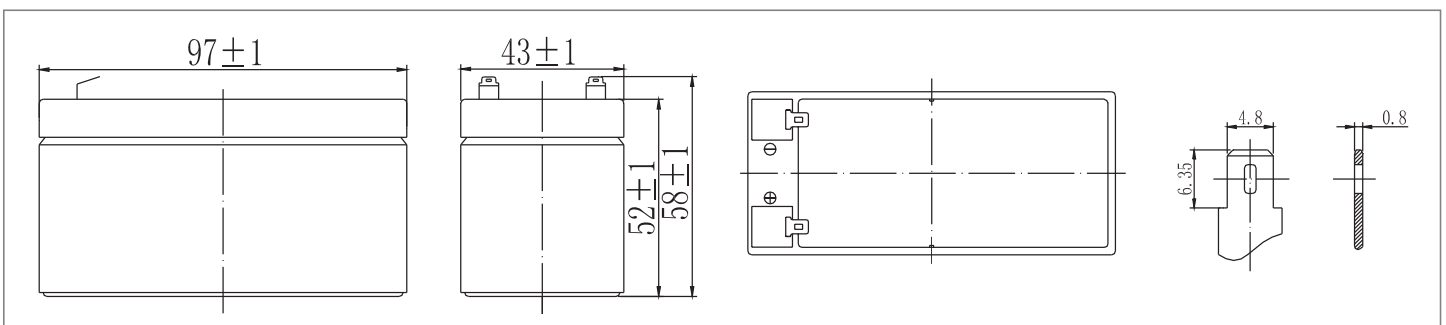

Constant Current Discharge (Amperes) at 25°C

End Voltage (Volts/Cell)	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	10 h	20 h
1.60 V	4.3	2.7	2.14	1.20	0.736	0.406	0.290	0.226	0.196	0.107	0.061
1.65 V	4.2	2.6	2.09	1.18	0.725	0.403	0.288	0.225	0.195	0.107	0.060
1.70 V	4.0	2.5	2.01	1.14	0.706	0.400	0.286	0.224	0.193	0.106	0.060
1.75 V	3.8	2.4	1.94	1.11	0.692	0.394	0.284	0.222	0.192	0.106	0.060
1.80 V	3.6	2.3	1.84	1.07	0.671	0.384	0.276	0.215	0.186	0.103	0.056


Constant Power Discharge (Watts) at 25°C

End Voltage (Volts/Cell)	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	10 h	20 h
1.60 V	48.0	30.6	24.4	13.8	8.52	4.75	3.45	2.70	2.34	1.29	0.729
1.65 V	46.4	29.6	23.8	13.5	8.39	4.72	3.43	2.68	2.32	1.28	0.726
1.70 V	44.5	28.4	22.9	13.1	8.18	4.68	3.40	2.66	2.31	1.27	0.721
1.75 V	42.6	27.2	22.1	12.7	8.02	4.61	3.38	2.64	2.29	1.27	0.720
1.80 V	39.7	25.6	21.0	12.3	7.77	4.49	3.28	2.56	2.22	1.24	0.677


(Note) The above characteristics data are average values obtained within three charge/discharge cycles.

SPA 12 - 1.3 | VRLA Battery


Temperature Effects on Float Life

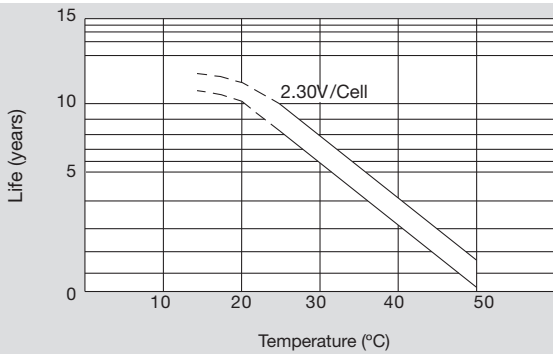


Self Discharge Characteristics

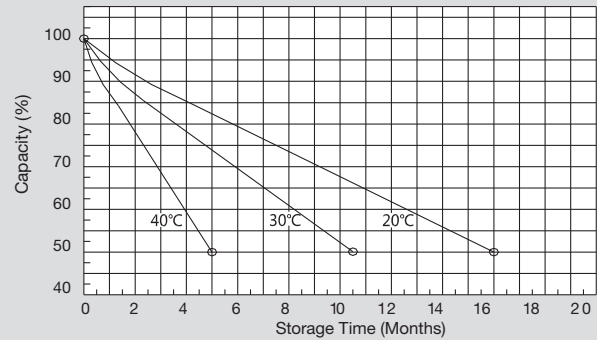


Discharge Characteristics (25°C)

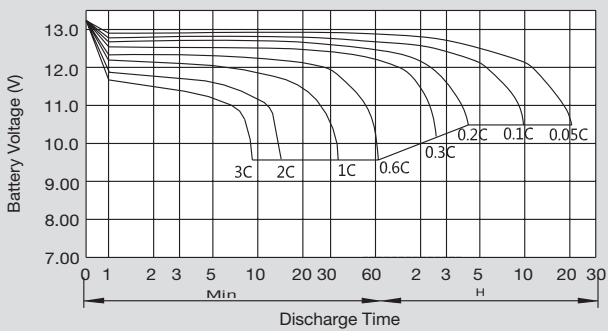


Charging Characteristics (25°C)

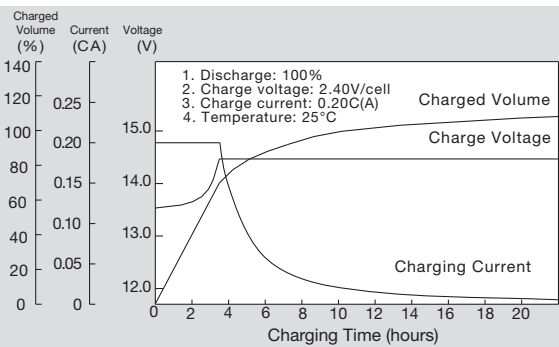


Relationship Between Charging Voltage and Temperature

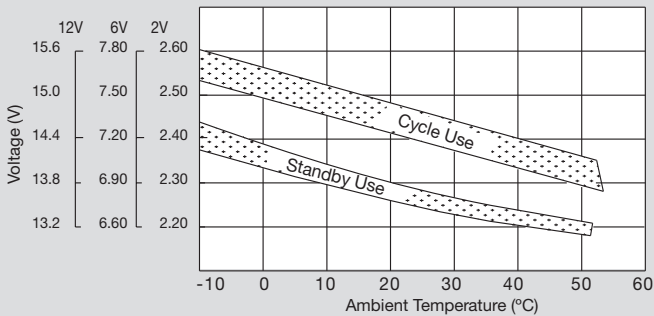


Relationship Between Open Circuit Voltage and Residual Capacity (25°C)

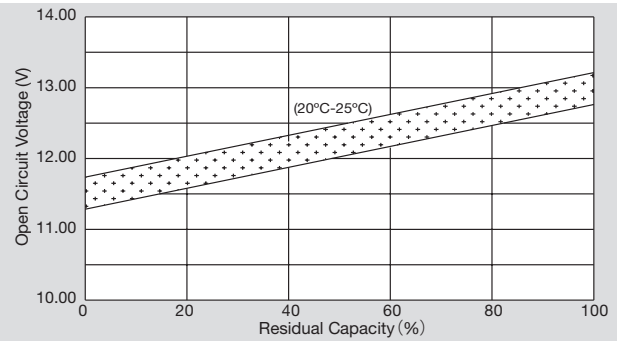

Cycle Service Life in Relation to Depth of Discharge

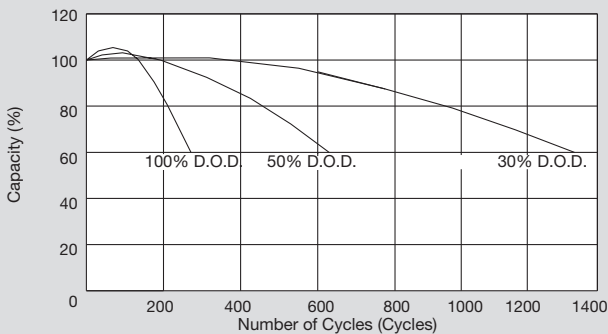

Temperature Effects on Capacity

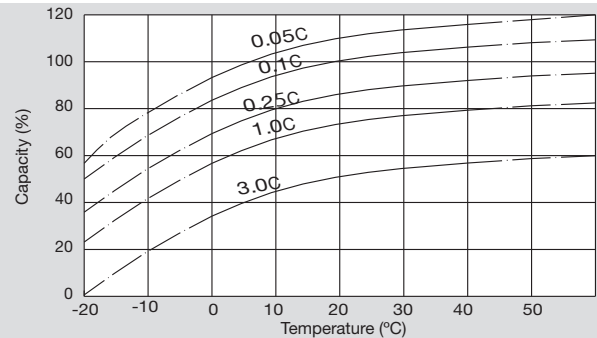

Headquarters 2 Ermou & Nikis Street | Syntagma Square | 105 63 | Athens | Greece | EU

Manufacturing Plant Neo Olvio | 672 00 Xanthi | Greece | EU

Recycling Plant Industrial Area of Komotini | 691 00 Komotini | Greece | EU

Southeast Europe Industrial Sales 14B Menexedon Street | 145 64 Kato Kifissia | Greece | EU

European Battery Assembly (SEBA) 175, Via Stra | 37030 Colognola Ai Colli Verona | Italy | EU

Industrial SRL 11, Soseaua Centurii | 077025 Bragadiru, Judet Ilfov | Romania | EU

T +30 210 6245400

T +30 25410 48100

T +30 25310 82460

T +30 210 6245600

T +39 045 7651771

T +40 021 3517777

F +30 210 6245409

F +30 25410 95446

F +30 25310 82489

F +30 210 6245619

F +39 045 7651771

F +40 021 3516667

 **SUNLIGHT**
Reliable Battery Solutions