NPL-Series - Valve Regulated Lead Acid Battery

NPL130-6IFR


SPECIFICATIONS		
Nominal voltage	6	V
20-hr rate Capacity to 5.25V at 20°C	130	Ah
10-hr rate Capacity to 5.4V at 20°C	114.4	Ah
DIMENSIONS	114.4	All
	250 (+0.7)	
Length Width	350 (±0.7) 166 (±0.5)	mm
Height	174 (±0.5)	mm
(height over terminals)	N/A	mm
Mass (typical)	23.0	kg
	20.0	Ng
Female threaded terminal	M6	mm
Torque	4.8	Nm
OPERATING TEMPERATURE RANGE		
Storage (in fully charged condition)	-20°C to +50°C	
Charge	-15°C to +50°C	
Discharge	-20°C to +60°C	
STORAGE		
Capacity loss per month at 20°C (approx)	3	%
CASE MATERIAL		
Standard Option	ABS (UL.94:HB)	
Flame retardant option (FR)	ABS (UL94:V0)	
CHARGE VOLTAGE		
	6.825 (±1%)	V
Float charge voltage at 20°C	2.275 (±1%)	V/cell
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C
Cyclic (or Boost) charge at 20°C	7.26 (±3%) 2.42 (±3%)	V V/cell
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C
CHARGE CURRENT		
Float charge current limit	No limit	А
Cyclic (or Boost) charge current limit	32.50	А
MAXIMUM DISCHARGE CURRENT		
1 second	500	А
1 minute	260	А
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE		
(according to EN IEC 60896-21)		
Internal resistance	N/A	m
Short-Circuit current	N/A	А
IMPEDANCE		
Measured at 1 kHz	2.5	m
PERFORMANCE & CHARACTERISTICS		
Refer to the technical manual	NPL	
DESIGN LIFE		
EUROBAT Classification: High performance	10 to 12	years
Yuasa design life @ 20°C	up to 10	years
SAFETY		,

Installation

Can be installed and operated in any orientation except permanently inverted



Data Sheet

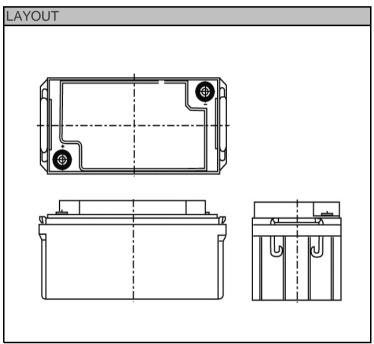

This battery type must never be installed permanently suspended by their handles

3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems ISO 14001 - Environmental Management Systems EN 18001 - OHSAS Management Systems UNDERWRITERS LABORATORIES Inc.



STANDARDS

IEC61056 IEC60896-21/22







Handles

Batteries must not be suspended by their handles (where fitted)

Vent valves

Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.

Gas Release

VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container

Recycling

YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations







ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE Issue No.: V.2 / Issue Date: March 2011



YUASA BATTERY SALES UK LTD. Unit 13, Hunts Rise South Marston Industrial Estate Swindon SN3 4TG UK

www.yuasaeurope.com	NPL	