




## 6FS-220 FS Series

Rolls 6V 220Ah (C20) Deep Cycle Battery

RESERVE CAPACITY	CCA	
@25AMPS	MCA@0°C	CCA@-18°C
315 Mins.	888	710

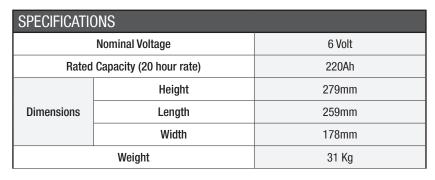


PLATES			
Cells		6	
Plates/Cell		17	
Positive Plate Dimension	Height	159mm	
	Width	159mm	
	Thickness	2.79mm	
Negative Plate Dimension	Height	159mm	
	Width	159mm	
	Thickness	2.24mm	
Separator Thickness		2mm	
Insulation Glass Mat		1mm	



CHARACTERISTICS			
Capacity 77°F (25°C)	20 Hour Rate	220 Ah	
	10 Hour Rate	196 Ah	
	5 Hour Rate	175 Ah	
Current (Amps)	20 Hour Rate	11	
	10 Hour Rate	19.6	
	5 Hour Rate	35	
Electrolyte Reserve Above Plates	57 mm		

CONTAINER CONSTRUCTION		
Container	Polypropylene	
Cover	Polypropylene	
Terminals	Dual Post	
Handles	No Handles	

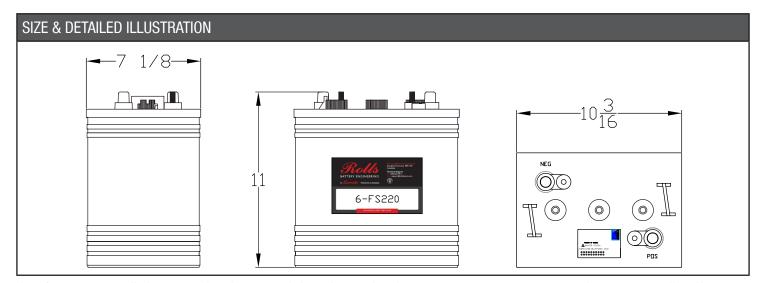

This information is generally descriptive only and is not intended to make or imply and representation, guarantee or warranty with respect to any cells and batteries. Call and battery design/specifications are subject to modifications without notice. For further information contact Rolls Battery Europe.

