


Specifications

Nominal Voltage		6V
Rated Capacity (20 hour rate)		240AH
Dimension	Total Height (with terminals)	275mm(10.83 inches)
	Height	275mm(10.83inches)
	Length	244mm(9.61inches)
	Width	190mm(7.48inches)
Weight		Approx.31.0kg (68.20lbs)


Characteristics

Capacity 77°F (25°C)	20 hour rate (12A to 5.25Volts)	240AH
	10 hour rate (22.3A to 5.25Volts)	223AH
	5 hour rate (39.9A to 5.1Volts)	199.5AH
	1 hour rate (141A to 4.8Volts)	141AH
Internal Resistance	Full charged 77°F (25°C)	1.8m Ω
Standard Terminal	AP	
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F (25°C)	2000A (5s)	
Maximum Charge Current(A)	48A	
Charging (Constant Voltage)	Cycle	7.25V~7.45V/77°F (25°C)
	Float	6.8V~6.9V/77°F (25°C)
Temperature compensation coefficient of charging voltage (mV/°C/cell)	Cycle	-4mV/°C/cell
	Float	-3mV/°C/cell

Discharge characteristics 77°F (25°C)

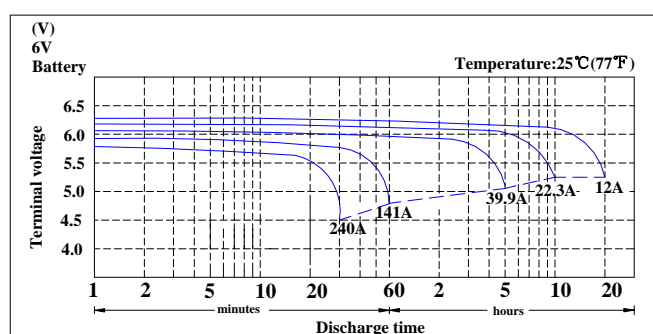

Duration of discharge vs. Discharge current

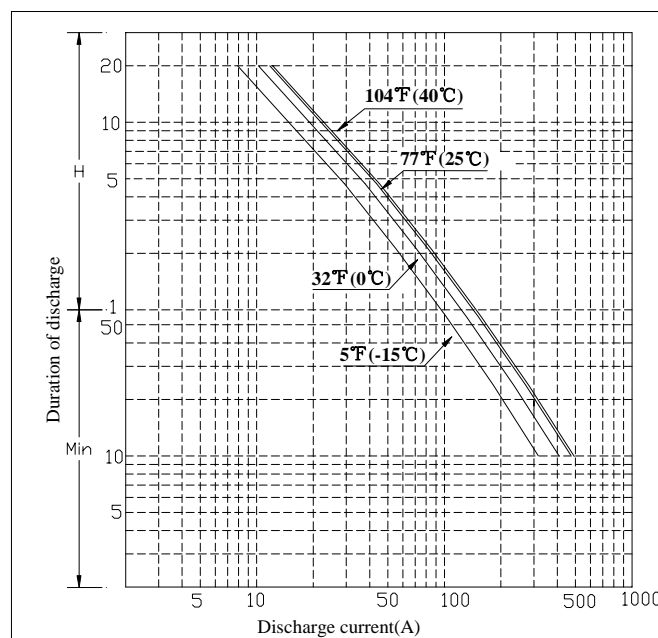

Constant Current Discharge Rating Amperes @ 77°F (25°C)

Cut off voltage V/cell	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	218	165	136.2	78.6	58.5	39.3	27.10	22.30	19.00	12.00	10.05

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.